

**WORLD INTELLECTUAL PROPERTY
ORGANIZATION**

世界知识产权组织

**ORGANIZACIÓN MUNDIAL
DE LA PROPIEDAD INTELECTUAL**



**ORGANISATION MONDIALE
DE LA PROPRIÉTÉ INTELLECTUELLE**

المنظمة العالمية للملكية الفكرية

**ВСЕМИРНАЯ ОРГАНИЗАЦИЯ
ИНТЕЛЛЕКТУАЛЬНОЙ СОБСТВЕННОСТИ**

CERTIFICATION

It is hereby certified that the attached copy is a true copy of the record copy of International Application No. PCT/SE2002/001992, filed with the Swedish Patent Office as receiving Office on 31 October 2002 (31.10.2002) and received by the International Bureau on 13 November 2002 (13.11.2002).

By: The International Bureau



Fabienne Gateau
Senior PCT Assistant
PCT Legal Affairs Section
PCT Legal Division

Date: 11 October 2007

RECORD COPY PCT

REQUEST

The undersigned request that the present international application be processed according to the Patent Cooperation Treaty.

For recei / Office use only	
International Application No.	PCT/ SE 02 / 01992
International Filing Date	31-10-2002
<div style="border: 1px solid black; padding: 5px; text-align: center;"> The Swedish Patent Office PCT International Application </div> Name of receiving Office and "PCT International Application"	
Applicant's or agent's file reference 115837 NEM (if desired) (12 characters maximum)	

Box No. I		TITLE OF INVENTION	
		Vehicle and method for automatic choice of gear in a gear box mounted in a vechicle.	
Box No. II		APPLICANT	
Name and address: <i>(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i>		<input type="checkbox"/> This person is also inventor.	
Volvo Lastvagnar AB		Telephone No.	
SE-405 08 GÖTEBORG		Facsimile No.	
Sweden		Teleprinter No.	
State (that is, country) of nationality: Sweden		State (that is, country) of residence: Sweden	
This person is the applicant for the purposes of:		<input type="checkbox"/> all designated States <input checked="" type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box	
Box No. III		FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)	
Name and address: <i>(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i>		This person is:	
STEEN, Marcus		<input type="checkbox"/> applicant only	
Fotbollsvägen 31		<input checked="" type="checkbox"/> applicant and inventor	
SE-424 33 ANGERED		<input type="checkbox"/> inventor only <i>(If this check-box is marked, do not fill in below.)</i>	
Sweden			
State (that is, country) of nationality: Sweden		State (that is, country) of residence: Sweden	
This person is the applicant for the purposes of:		<input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input checked="" type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box	
X Further applicants and/or (further) inventors are indicated on a continuation sheet.			
Box No. IV		AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE	
The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:		<input checked="" type="checkbox"/> agent <input type="checkbox"/> common representative	
Name and address: <i>(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)</i>		Telephone No.	
ANDERSSON Per, BERGQUIST Gunnar, BRUN Jonny, BÖRJESSON Susanne, EKSTRÖM Nils, EKWALL Peter, GRAUDUMS Valdis, HARRISON Michael, MOSSMARK Anders, OLSSON Stefan, ROMARE Anette, SCHLOSSMAN Ulf, SKEPPSTEDT Anita, SÖRSDAHL Petter		+46 31 725 81 00	
ALBIHNS GÖTEBORG AB,		Facsimile No.	
P.O. Box 142,		+46 31 711 95 55	
S-401 22 GÖTEBORG, Sweden		Teleprinter No.	
<input type="checkbox"/> Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.			

Continuation of Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)			
<i>If none of the following sub-boxes is used, this sheet is not to be included in the request</i>			
Name and address: <i>Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i> ERIKSSON, Anders Lövskogsgatan 14 SE-413 20 GÖTEBORG Sweden		This person is: <input type="checkbox"/> applicant only <input checked="" type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only <i>(If this check-box is marked, do not fill in below.)</i>	
State (i.e. country) of nationality: Sweden		State (i.e. country) of residence: Sweden	
This person is the applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input checked="" type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box			
Name and address: <i>Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i> LAURI, Erik Eklanda Bäck 150 431 49 MÖLNDAL Sweden		This person is: <input type="checkbox"/> applicant only <input checked="" type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only <i>(If this check-box is marked, do not fill in below.)</i>	
State (i.e. country) of nationality: Sweden		State (i.e. country) of residence: Sweden	
This person is the applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input checked="" type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box			
Name and address: <i>Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i> (Empty)		This person is: <input type="checkbox"/> applicant only <input type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only <i>(If this check-box is marked, do not fill in below.)</i>	
State (i.e. country) of nationality:		State (i.e. country) of residence:	
This person is the applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box			
Name and address: <i>Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)</i> (Empty)		This person is: <input type="checkbox"/> applicant only <input type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only <i>(If this check-box is marked, do not fill in below.)</i>	
State (i.e. country) of nationality:		State (i.e. country) of residence:	
This person is the applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box			
<input type="checkbox"/> Further applicants and/or (further) inventors are indicated on a continuation sheet.			

Box No. V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

Regional Patent

- ☒ **AP ARIPO Patent:** GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, MZ Mozambique, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZM Zambia, ZW Zimbabwe and any other State which is a Contracting state of the Harare Protocol and of the PCT
- ☒ **EA Eurasian Patent:** AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ **EP European Patent:** AT Austria, BE Belgium, BG Bulgaria, CH and LI Switzerland and Liechtenstein, CY Cyprus, CZ Czech Republic, DE Germany, DK Denmark, EE Estonia, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, SK Slovakia, TR Turkey, and any other State which is Contracting State of the European Patent Convention and of the PCT
- ☒ **OA OAPI Patent:** BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GQ Equatorial Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line).....

National Patent (if other kind of protection or treatment desired, specify on dotted line):

- | | | |
|---|--|--|
| <input checked="" type="checkbox"/> AE United Arab Emirates | <input checked="" type="checkbox"/> GE Georgia | <input checked="" type="checkbox"/> MZ Mozambique |
| <input checked="" type="checkbox"/> AG Antigua and Barbuda | <input checked="" type="checkbox"/> GH Ghana | <input checked="" type="checkbox"/> NO Norway |
| <input checked="" type="checkbox"/> AL Albania | <input checked="" type="checkbox"/> GM Gambia | <input checked="" type="checkbox"/> NZ New Zealand |
| <input checked="" type="checkbox"/> AM Armenia | <input checked="" type="checkbox"/> HR Croatia | <input checked="" type="checkbox"/> OM Oman |
| <input checked="" type="checkbox"/> AT Austria | <input checked="" type="checkbox"/> HU Hungary | <input checked="" type="checkbox"/> PH Philippines |
| <input checked="" type="checkbox"/> AU Australia | <input checked="" type="checkbox"/> ID Indonesia | <input checked="" type="checkbox"/> PL Poland |
| <input checked="" type="checkbox"/> AZ Azerbaijan | <input checked="" type="checkbox"/> IL Israel | <input checked="" type="checkbox"/> PT Portugal |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina | <input checked="" type="checkbox"/> IN India | <input checked="" type="checkbox"/> RO Romania |
| <input checked="" type="checkbox"/> BB Barbados | <input checked="" type="checkbox"/> IS Iceland | <input checked="" type="checkbox"/> RU Russian Federation |
| <input checked="" type="checkbox"/> BG Bulgaria | <input checked="" type="checkbox"/> JP Japan | <input checked="" type="checkbox"/> SD Sudan |
| <input checked="" type="checkbox"/> BR Brazil | <input checked="" type="checkbox"/> KE Kenya | <input checked="" type="checkbox"/> SE Sweden |
| <input checked="" type="checkbox"/> BY Belarus | <input checked="" type="checkbox"/> KG Kyrgyzstan | <input checked="" type="checkbox"/> SG Singapore |
| <input checked="" type="checkbox"/> BZ Belize | <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea | <input checked="" type="checkbox"/> SI Slovenia |
| <input checked="" type="checkbox"/> CA Canada | <input checked="" type="checkbox"/> KR Republic of Korea | <input checked="" type="checkbox"/> SK Slovakia |
| <input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein | <input checked="" type="checkbox"/> KZ Kazakstan | <input checked="" type="checkbox"/> SL Sierra Leone |
| <input checked="" type="checkbox"/> CN China | <input checked="" type="checkbox"/> LC Saint Lucia | <input checked="" type="checkbox"/> TJ Tajikistan |
| <input checked="" type="checkbox"/> CO Colombia | <input checked="" type="checkbox"/> LK Sri Lanka | <input checked="" type="checkbox"/> TM Turkmenistan |
| <input checked="" type="checkbox"/> CR Costa Rica | <input checked="" type="checkbox"/> LR Liberia | <input checked="" type="checkbox"/> TN Tunisia |
| <input checked="" type="checkbox"/> CU Cuba | <input checked="" type="checkbox"/> LS Lesotho | <input checked="" type="checkbox"/> TR Turkey |
| <input checked="" type="checkbox"/> CZ Czech Republic | <input checked="" type="checkbox"/> LT Lithuania | <input checked="" type="checkbox"/> TT Trinidad and Tobago |
| <input checked="" type="checkbox"/> DE Germany | <input checked="" type="checkbox"/> LU Luxembourg | <input checked="" type="checkbox"/> TZ United Republic of Tanzania |
| <input checked="" type="checkbox"/> DK Denmark | <input checked="" type="checkbox"/> LV Latvia | <input checked="" type="checkbox"/> UA Ukraine |
| <input checked="" type="checkbox"/> DM Dominica | <input checked="" type="checkbox"/> MA Morocco | <input checked="" type="checkbox"/> UG Uganda |
| <input checked="" type="checkbox"/> DZ Algeria | <input checked="" type="checkbox"/> MD Republic of Moldova | <input checked="" type="checkbox"/> US United States of America |
| <input checked="" type="checkbox"/> EC Ecuador | <input checked="" type="checkbox"/> MG Madagascar | <input checked="" type="checkbox"/> UZ Uzbekistan |
| <input checked="" type="checkbox"/> EE Estonia | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia | <input checked="" type="checkbox"/> VN Viet Nam |
| <input checked="" type="checkbox"/> ES Spain | <input checked="" type="checkbox"/> MN Mongolia | <input checked="" type="checkbox"/> YU Yugoslavia |
| <input checked="" type="checkbox"/> FI Finland | <input checked="" type="checkbox"/> MW Malawi | <input checked="" type="checkbox"/> ZA South Africa |
| <input checked="" type="checkbox"/> GB United Kingdom | <input checked="" type="checkbox"/> MX Mexico | <input checked="" type="checkbox"/> ZM Zambia |
| <input checked="" type="checkbox"/> GD Grenada | | <input checked="" type="checkbox"/> ZW Zimbabwe |

Check boxes reserved for designating States which have become party to the PCT after issuance of this sheet:

- ☒ VC Saint Vincent and the Grenadines
- ☐

Precautionary Designation Statement: In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)


Box No. VI PRIORITY CLAIM		<input type="checkbox"/> Further priority claims are indicated in the Supplemental Box		
Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application: country:	regional application:* regional Office	international application: receiving Office
item (1) 31/10/2001 ^A 31 Oct. 2001	0103615-1	SE		
item (2)				
item (3)				

X The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of the present international application is the receiving Office) identified above as item(s): (1)

* Where the earlier application is an ARIPO application, it is mandatory to indicate in the Supplemental Box at least one country party to the Paris convention for the Protection of Industrial Property for which that earlier application was filed (Rule 4.10(b)(ii)). See supplemental Box.

Box No. VII INTERNATIONAL SEARCHING AUTHORITY			
Choice of International Searching Authority (ISA) (If two or more international Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):		Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):	
ISA /		Date (day/month/year): Number Country (or regional Office)	
		(31/10/2001) ^Y 31 Oct. 2001 01/01534 SE	

Box No. VIII CHECK LIST; LANGUAGE OF FILING	
This international application contains the following number of sheets: request: 4 description (excluding sequence listing part): 14 claims: 5 abstract: 1 drawings: 9 sequence listing part of description: _____ Total number of sheets: 33	This international application is accompanied by the item(s) marked below: 1. <input type="checkbox"/> fee calculation sheet 2. <input type="checkbox"/> separate signed power of attorney 3. <input type="checkbox"/> copy of general power of attorney; reference number, if any: 4. <input type="checkbox"/> statement explaining lack of signature 5. <input type="checkbox"/> priority document(s) identified in Box No. VI as item(s): 6. <input type="checkbox"/> translation of international application into (language): 7. <input type="checkbox"/> separate indications concerning deposited microorganism or other biological material 8. <input type="checkbox"/> nucleotide and/or amino acid sequence listing in computer readable form 9. X other (specify): Copy of ITS-report No. SE 01/01534
Figure of the drawings which should accompany the abstract:	Language of filing of the international application: Swedish

Box No. IX SIGNATURE OR APPLICANT OR AGENT	
Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).	
Göteborg 31 October 2002  Nils Ekström	

RO/S.

1. Date of actual receipt of the purported international application: 31-10-2002 For receiving Office use only 3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application: 4. Date of timely receipt of the required corrections under PCT-Article 11(2): 5. International Searching Authority (if two or more are competent): ISA/SE	2. Drawings: <input checked="" type="checkbox"/> received: <input type="checkbox"/> not received: 6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid
---	--

Date of receipt of the record copy by the International Bureau:

For International Bureau use only

13 NOVEMBER 2002

115837 NEM/LAN

2003-02-21

5 **Vehicle and method for automatic choice of gear in a gear
box mounted in a vehicle**

BACKGROUND OF THE INVENTION

The present invention relates to a vehicle according to the preamble to claim 1
and a method for automatic gear selection in a gearbox forming part of a vehicle
10 as a function of the current rotational speed of a shaft forming part of the said
gearbox according to claim 13.

DESCRIPTION OF THE PRIOR ART

In order to facilitate the handling of vehicles they are provided, where
15 appropriate, with automatic gearboxes. The term automatic gearboxes relates
to all types of gearboxes in which gears are selected without the direct
intervention of an operator or driver. An example of an automatic gearbox in
which gears are selected via an electronic control unit is given in EP 155043.
Where appropriate, automatic gearboxes can be set to an operating mode in
20 which the operator or driver selects gears by activating a gear selector. An
example of a gear selection device is given in WO 01/55622. The invention can
also be used in a type of gearbox in which the device described in WO 01/55622
is used, in which gears are selected without the direct intervention of an operator
or driver.

25

In known electronically controlled automatic gearboxes, downshifting to a lower
gear is controlled in that a control element receives information on the current
rotational speed of the gearbox or alternatively the current rotational speed of an
engine coupled to the gearbox. Downshifting is done in order to ensure that

sufficient torque is available to drive the gearbox. Figure 1 shows a torque curve giving the torque delivered as a function of the speed of a diesel internal combustion engine. The torque curve shows a relatively steep flank from the idling speed, after which the torque levels out around an operating range and then falls sharply. In order to achieve good driveability in a vehicle having an internal combustion engine, a signal for downshifting to a lower gear is emitted when the internal combustion engine is in an operating condition corresponding to an engine speed situated approximately midway along the said steep flank. For conventional diesel engines intended for heavy trucks the gearbox control unit is designed with a higher transmission ratio of up to approximately 800 – 1200 rpm, depending, for example, on load, gradient and accelerator pedal position. A common idling speed for internal combustion engines intended for heavy trucks is approximately 600 rpm.

15 Gearboxes for heavy vehicles are normally equipped with a large number of gear positions. A normal number of gears for a vehicle in forward drive may be 12 to 18 gears. This means that the difference in transmission ratio between two gears is relatively slight, so that a large number of gears will be encountered when running at varying speed or varying torque. This is normally positive when a heavily laden vehicle can accelerate freely from stationary to the desired running speed. On the other hand, gearshifts are experienced as problematical in driving situations in which a driver has temporarily released the throttle before accelerating away immediately thereafter, as when a vehicle slows down in cornering or taking a roundabout, for example. Another example of operating interference due to frequent gearshifts is when a vehicle has to be driven in a line of traffic, in which a sequence of gearshifts under torque occurs despite the fact that the driver primarily wishes to maintain and adjust the speed of his vehicle to the speed of the line of traffic. Unwanted gearshifts generally give a vehicle characteristics that are difficult to control, firstly since the drive torque to

the wheels of the vehicle varies with the gear ratio in the gearbox, and secondly because the gearshift sequence takes a relatively long time during which the working of the drivetrain is interrupted. The overall result is a drive torque that is difficult to control, to the detriment of the vehicle handling characteristics.

5

SUMMARY OF THE INVENTION

An object of the invention is to provide a vehicle containing an internal combustion engine and a drivetrain coupled to the said internal combustion engine, comprising a gearbox and a control unit for automatic gear selection as
10 a function of the current rotational speed of an input shaft to the gearbox, in which the controllability of the drive torque is increased when operating the vehicle under low engine load. This object is achieved by a vehicle according to the characterizing part of claim 1, so that in addition to a first operating mode corresponding to normal driving with a first downshift limit, it can assume a
15 second operating mode having a second working rotational speed with a second lower limit for downshifting to a gear with a higher transmission ration, in which the second limit is lower than the idling speed of the internal combustion engine and is equal to a lower rotational speed than the first limit, thereby permitting a larger working range in which fewer gears will be encountered, thus giving the
20 driver improved torque control. By means of the invention, therefore, the vehicle can be driven at idling speed while ever sufficient torque is available. In such cases the speed of the vehicle is determined by the gear engaged.

The term transmission ratio relates to the input rotational speed to the gearbox
25 divided by the output rotational speed from the gearbox.

In a first preferred embodiment the control unit comprises a memory unit in which a representation of the highest permitted gear in the said second working

speed range is stored. This ensures that the correct gear is engaged and that sufficient torque is available.

5 In a second preferred embodiment the control unit is coupled to elements for indicating the selection of first or second operating mode.

10 In a third preferred embodiment the control unit is designed to select the said highest permitted gear when the control unit has assumed the said second operating mode.

15 In a fourth preferred embodiment the specified torque at the said idling speed is controlled by an idling speed regulator connected to the internal combustion engine of the vehicle. This means that the vehicle can be driven at constant speed in a manner easily controllable by the driver.

20 In a fifth preferred embodiment of the invention the representation of the highest permitted gear comprises a representation defining the highest permitted gear at idling speed as a function of the current weight of the vehicle and the current gradient of the road on which the vehicle is being driven. Basing the representation of the highest permitted gear on information on the vehicle weight and the road gradient means that the dynamic conditions of the vehicle are given, so that the magnitude of the required drive torque can be estimated with a good degree of accuracy.

25 In a sixth preferred embodiment the control unit contains a representation defining the highest permitted starting gear as a function of the current weight of the vehicle and the current gradient of the road on which the vehicle is being driven. According to this embodiment the representation defining the highest permitted gear at idling speed is based on the representation defining the

highest permitted starting gear. This means that available information can be used for two purposes, thereby saving on data capacity.

5 In a seventh preferred embodiment the representation defining the highest permitted gear at idling speed consists of the said representation defining the highest permitted starting gear plus a predetermined number of gear shift stages. The preferred embodiment provides a gear selection when driving at idling speed, which by very simple means gives sufficient available torque at idling speed.

10

In an eighth preferred embodiment the vehicle contains elements for establishing that the internal combustion engine is delivering sufficient torque for operation of the vehicle at an operating speed equal to a rotational speed of a gearbox input shaft below the said first limit. This element ensures that
15 sufficient torque is available for operation in the highest permitted gear. Should sufficient torque not be available, the control unit ensures that a lower gear is selected.

20 In a ninth preferred embodiment the vehicle drivetrain contains a clutch unit arranged between the internal combustion engine and the gearbox, the drivetrain being divided into a first part up to the clutch unit and comprising the internal combustion engine and a second part from the clutch unit onwards and comprising the gearbox. According to this ninth embodiment the second downshifting limit is equal to a speed lower than the idling speed of the internal
25 combustion engine, and the vehicle furthermore contains a sensor for measuring the current rotational speed, the said sensor being designed to measure the said rotational speed in the second part of the drivetrain. According to the embodiment the clutch unit is designed to absorb a speed differential between the rotational speed of the first and second parts of the drivetrain where

insufficient torque has been delivered from the internal combustion engine, following which a rotational speed equal to the second downshifting limit is reached and downshifting is permitted. This embodiment provides highly reliable elements for establishing that the internal combustion engine is
5 delivering sufficient torque.

In a tenth preferred embodiment the control unit is designed to establish that the internal combustion engine is delivering sufficient torque by performing a comparison between an estimate of the torque delivered by the internal
10 combustion engine in the current operating state and the torque demanded from the internal combustion engine for operation of the vehicle in the current operating state.

In an eleventh preferred embodiment the elements for indicating selection of the
15 first or second operating mode comprise a throttle lever forming part of the vehicle, the said control unit being designed to assume its second operating mode should the throttle lever be released into an idling position whilst in motion. By utilizing the throttle lever and the fact that a driver releases the throttle lever in a given operating situation, entry into the second operating mode
20 occurs in a natural vehicle operating state, thereby improving the handling drive characteristics of the vehicle.

The invention also relates to a method for automatic gear selection in a gearbox forming part of a vehicle as a function of the current rotational speed of a shaft
25 forming part of the said transmission. The method according to claim 13 provides a vehicle in which operation for the said highest permitted gear is allowed within a larger working range, so that fewer gearshifts will be performed, thereby improving a driver's control over the drive torque.

Other preferred embodiments relating to methods of automatic gear selection have advantages in common with the aforementioned preferred embodiments of the vehicle.

5 DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will be described in more detail below with reference to the drawings attached, in which

- 10 Fig. 1 shows a torque curve from a diesel engine in which the invention can advantageously be used,
- Fig. 2 shows a schematic representation of a type of internal combustion engine with drivetrain in which the invention can advantageously be used,
- 15 Fig. 3 shows a schematic representation of a gearbox of a type in which the invention can advantageously be used,
- Fig. 4 shows a schematic representation of a drivetrain,
- 20 Fig. 5 shows a schematic representation of a control algorithm for the gearbox control unit,
- Fig. 6 shows a gear selection diagram,
- 25 Fig. 7 shows a gear selection diagram in the second operating mode of the control unit,
- Fig. 8 shows a representation of starting gear selection,

Fig. 9 shows a flow chart for a method for automatic selection of gearshift position,

5 Fig. 10 shows a detail from the flow chart shown in Figure 8.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 2 shows a schematic representation of a type of internal combustion
10 engine with drivetrain in which the invention can advantageously be used. 1 denotes a six-cylinder internal combustion engine, for example a diesel engine, the crankshaft 2 of which is coupled to a single-disk dry-plate clutch generally denoted by 3, which is enclosed in a clutch cover 4. The crankshaft 2 is rotationally fixed to the clutch housing 5 of the clutch 3, whilst the plate disk 6
15 thereof is rotationally fixed to an input shaft 7, which is rotatably supported in the casing 8 of a gearbox generally denoted by 9. A main shaft 10 and an intermediate shaft 11 are rotatably mounted in the casing 8. An electrical machine 82, which is an integrated starter motor and alternator, which can thus be controlled either as motor for driving the crankshaft 2 of the internal
20 combustion engine or, driven by the engine crankshaft, as alternator for generating electrical current, is connected between the crankshaft 2 of the engine and the clutch 3.

As will be most clearly seen from Figure 3, a gear 12 is rotatably mounted on the
25 input shaft 7 and can be locked to the shaft by means of a clutch sleeve 13, which is provided with synchromesh elements and is supported so that it cannot rotate but is axially displaceable on a hub 14 rotationally fixed to the input shaft. By means of the clutch sleeve 13, a gear 15 rotatably supported on the main shaft 10 can also be locked in relation to the input shaft 7. With the clutch

sleeve 13 in a middle position, both gears 12 and 15 are disengaged from their shafts 7 and 10 respectively. The gears 12 and 15 mesh with gears 16 and 17 respectively, which are rotationally fixed to the intermediate shaft 11. Further gears 18, 19 and 20 are torsionally fixed on the intermediate shaft 11, these
5 gears meshing with gears 21, 22 and 23 rotatably supported on the main shaft 10, which can be locked on the main shaft by means of clutch sleeves 24 and 25, which in the exemplary embodiment shown lack synchromesh devices. A further gear 28 is rotatably supported on the main shaft 10 and meshes with an intermediate gear 30, which is rotatably supported on a separate shaft 29 and
10 which in turn meshes with the intermediate shaft gear 20. The gear 28 can be locked on its shaft by means of a clutch sleeve 26.

The gear pairs 12, 16 and 15, 17 together with the clutch sleeve 13 form a splitter group having a low shift stage LS and a high shift stage HS. The gear
15 pair 15, 17 together with the gear pairs 21, 18, 22, 19, 23, 20 and 28, 30 form a basic gearbox with four forward gears and one reverse gear. Torsionally fixed to the output end of the main shaft is a gear 31, which forms the sun gear in a split-range transmission of the planetary-type denoted by 32, the planet wheel carrier 33 of which is torsionally fixed to a shaft 34, which forms the gearbox output
20 shaft. Planet wheels 35 of the range transmission 32 mesh with an annular gear 36, which by means of a clutch sleeve 37 can be locked in relation to the gearbox casing 8 for low range LR and in relation to the planet wheel carrier 33 for high range HR. The clutch sleeves 13, 24, 25, 26 and 37 are displaceable as indicated by the arrows in Figure 3, giving the shift positions shown adjacent to
25 the arrows. They are displaced by servo devices 40, 41, 42, 43, and 44, indicated schematically in Figure 3, which may be electro-pneumatically operated piston-cylinder arrangements of the type used in a gearbox of the above-mentioned type, marketed under the name of Geartronic ®.

The servo devices 40, 41, 42, 43 and 44 are controlled by an electronic control unit 45 (Figure 2), comprising a microprocessor, as a function of signals representing various engine and vehicle data that are fed into the control unit, which cover at least the engine speed, road speed, accelerator pedal position and, where appropriate, engine brake off/on, when an electronic gear selector 46 coupled to the control unit 45 is in its automatic shift position. When the selector is in the manual shift position, shifting is performed at the driver's command via the gear selector 46. A management unit 53 separately assigned to the engine also controls the fuel injection, that is to say the engine speed, as a function of the accelerator pedal position and the air supply to a pneumatic piston-cylinder arrangement 47, by means of which the clutch 3 is disengaged.

Figure 4 shows a schematic representation of a drivetrain. The drivetrain comprises the internal combustion engine 1, the clutch 3 where appropriate, the gearbox 9, a drive shaft 48 coupled to the gearbox output shaft, driven axle 49 and wheel 50. According to one embodiment of the invention, which has also been described above, the internal combustion engine 1 is coupled to the gearbox 9 via a clutch 3, which may be of dry-plate type. The drivetrain is thereby divided into a first part 51, which extends up to the clutch unit and includes the internal combustion engine 1, and a second part 52 from the clutch unit 3 which comprises the gearbox 9 together with a control unit 45 for automatic gear selection as a function of the current rotational speed of a gearbox input shaft.

The internal combustion engine is conventionally controlled by an engine management unit 53, which among other things controls the fuel injection quantity as a function of a current operating state of the vehicle. A decisive parameter for the operating state is the torque demand, which is controlled from a throttle lever 54 situated on the vehicle.

The engine management unit 53 may be included in the aforementioned control unit 45 for automatic gear selection, or the engine management unit may alternatively be a separate unit in communication with the control unit 45.

5

According to a preferred embodiment the vehicle furthermore comprises elements for estimating the vehicle weight 76 and elements 77 for estimating the current gradient of the road on which the vehicle is being driven. The said elements are designed in a way familiar to the person skilled in the art; for example the elements for estimating the vehicle weight may take the form of pressure load cells placed in the vehicle pneumatic suspension. The elements for estimating the road gradient may take the form of a gyro.

The microprocessor arranged in the control unit 45 for automatic gear selection is designed to be controlled according to a control algorithm, which is shown in Figure 5. A first processing stage asks 55 for the selection of first or second operating mode as indicated by operating mode selection indicator elements, which according to a preferred embodiment of the invention consist of the throttle lever 54. According to a preferred embodiment of the invention the control unit 45 assumes the second operating mode when a driver releases the throttle lever 54 in operation of the vehicle. The control unit will be kept in the second operating mode either until the brake pedal 78 present on the vehicle activates brakes 79 present on the vehicle, or until the throttle opening exceeds a specific upper limit, preferably corresponding to a throttle opening of 25 – 35%. According to one embodiment of the invention the control unit leaves its second operating mode when upshifting has occurred to a gear which lies outside the gear range which is defined by the interval between the lowest gear and the highest permitted gear when idling. If the first operating mode 56 has been selected, shifting is performed according to a first gear selection algorithm,

and if the second operating mode 57 has been selected shifting is performed according to a second gear selection algorithm. The control unit undertakes a recurrent updating of the operating mode selection so that in operation the vehicle is in the correct operating mode.

5

As a minimum, input data for each operating mode comprise information on the throttle opening 58, which is given from the throttle lever 54, and information on the current rotational speed 59 of the internal combustion engine or the drivetrain. In some familiar embodiments of control systems for vehicles, there are a number of sensors which register the engine speed and/or the rotational speed of shafts forming part of the gearbox 9. In the exemplary embodiment shown in Figure 4 an inductive sensor 60 coupled to the intermediate shaft 11 in the gearbox 9 supplies information on the rotational speed of the intermediate shaft. From the aforementioned information containing data on the throttle opening 58 and the rotational speed 59, the respective control algorithm in the first and the second operating modes supplies output data 61 in the form of a selected gear. This output data in turn controls servo devices 40, 41, 42, 43 and 44 forming part of the gearbox 9, the gearbox transmitting torque through the required gear.

10

15

20

Figure 6 shows a schematic representation of a gear selection strategy for upshifting and downshifting. The gear selection strategy that is used in the first normal mode is represented by solid lines and the gear selection strategy that is used in the second mode is represented by dashed lines. The gear selection strategy is described in a diagram with accelerator pedal position on the horizontal axis and the engine speed on the vertical axis. The lower curve 62 corresponds to a lower limit for downshifting to a gear with a higher transmission ratio. If the lower curve 62 is passed with engine speed falling as indicated by the arrow 66, downshifting occurs. The upper curve 63 corresponds to an upper

25

limit for upshifting to gear with a lower transmission ratio. If the upper curve 63 is passed with engine speed increasing as indicated by the arrow 66 upshifting occurs. Also shown by dashed lines is a second working speed range defined by a second lower limit 69 for downshifting to a gear with a higher transmission ratio. The second limit is lower than the idling speed of the internal combustion engine, which is indicated by a dashed line 80. If the control has assumed its second operating mode, which according to a preferred embodiment occurs if the driver releases the accelerator pedal, once the gearbox has assumed the highest permitted gear for driving at idling speed downshifting will not take place until the rotational speed in the gearbox is equal to a speed that is lower than the idling speed of the internal combustion engine. If the rotational speed is equal to the second lower limit 69, the internal combustion engine is delivering insufficient torque to permit driving at idling speed, so that downshifting occurs. In one embodiment of the invention the vehicle strategy for upshifting is also modified with the result that an upper limit 71 in excess of the upper limit 63 is established. In this case, in the second mode operation without upshifting is permitted in a working range with an upper limit 71, which exceeds the upper limit for operation in the first mode.

The first operating mode 56 defines a first working speed range with a first limit 68 for downshifting to a gear with a higher transmission ratio. This lower limit is represented by the lowest speed acceptable for a slight or non-existent throttle opening. The lower limit relates to the lowest accepted downshifting speed when downshifting by one shift stage. According to the preferred embodiment shown, this limit 68 is defined by a throttle opening of less than 30%.

Figure 7 shows a schematic representation of a gear selection strategy for upshifting and downshifting respectively, these strategies being used in the second operating mode. When the control unit 45 has assumed the second

operating mode 57, the control unit seeks the highest permitted gear in a second working speed range 70, which has a second downshifting limit 69. The second limit is equal to a lower rotational speed than the first limit 68. In a preferred embodiment of the invention the second limit 69 is set to a rotational speed
5 lower than the idling speed of the internal combustion engine 1. In this case the rotational speed must be measured in the drivetrain on that side of the clutch unit where the gearbox 9 is located. According to one embodiment which has been described above, measurement is performed on the intermediate shaft 11 by means of an inductive sensor.

10

The gear selection strategy also has an upshifting limit 71, which is equal to a high engine speed. According to one embodiment of the invention the upper limit 71 may be set, for example, to 1400 rpm. According to a preferred embodiment the second operating mode 57 only permits limited throttle opening,
15 a higher throttle opening resulting in exit from the second mode 57 and assumption of the first mode 56. According to a preferred embodiment this throttle opening limit is represented by a throttle opening of 30%.

The control unit 45 contains a memory unit 72 in which is stored a
20 representation of the highest permitted gear in the said second working speed range. A preferred embodiment of this representation 73 is shown in Figure 8. The representation 73 defines the highest permitted starting gear as a function of the current weight of the vehicle and current gradient of the road on which the vehicle is being driven. The gradient is given on the vertical axis, a positive inclination indicating an uphill gradient. The weight of the vehicle is given on the
25 horizontal axis. The highest permitted gear is given for the ranges shown in the figure. Information on the weight of the vehicle and the road gradient is supplied by elements for estimating the vehicle weight 76 and elements for estimating the road gradient 77. From this representation 73 a representation 74 is formed

of the highest permitted gear for driving at the idling speed of the internal combustion engine and is stored in the said second working speed range through the addition of a predetermined number of shift stages, for example 4 where a twelve-speed gearbox is used. When the second operating mode is
5 activated, the control unit 45 receives information on the highest gear selected, this gearshift position being maintained in the substantially larger working range 70.

The engine management unit 53 contains an idling speed regulator 75, which
10 ensures that the idling speed of the internal combustion engine is maintained under different engine loads. It will be seen from Figure 1 that at idling speed, that is to say approximately 600 rpm, the internal combustion engine has an available torque equal to approximately 50% of the maximum torque. This means that the engine has the capacity to drive the vehicle down to the idling
15 speed, provided that a sufficiently low gear is used. If the second limit 69 is set to a speed equal to the idling speed or lower, the idling speed regulator can thus be used for stable operation of the vehicle at a relatively constant speed of travel.

20 According to a preferred embodiment of the invention the vehicle contains elements for establishing that the internal combustion engine is delivering sufficient torque for operation of the vehicle in the second working speed range 70. According to one embodiment these elements comprise the control unit 45, which calculates the available torque and compares this with a torque demand
25 based on the gear selected, the vehicle weight and the road gradient. According to a second embodiment of the invention the said elements comprise the vehicle clutch 3, which in this case must be designed so that a differential speed occurs over the clutch when the engine is incapable of delivering the torque that is required in the current operating state. In this case the second downshifting limit

is located below the idling speed, slipping of the clutch occurring in the event of insufficient torque being available. A gradual disengagement then occurs so that the second limit 69 is reached and downshifting takes place. In this case the control unit does not leave the second operating mode but preferably
5 remains with a new highest accepted gear.

Figure 9 shows a flow chart for a method of automatic gear selection in a gearbox forming part of a vehicle as a function of the current rotational speed of a shaft forming part of the said gearbox. The method comprises a first stage
10 100 establishing a first operating mode of a control unit, in which the first operating mode comprises a first working speed range with a first lower limit for downshifting to a gear with a higher transmission ratio. In a second stage 110 of the method a second operating mode of the said control unit is established in which the second operating mode comprises a second working speed range
15 with a second lower limit for downshifting to a gear with a higher transmission ratio. In a third stage 120 of the method a representation is established of the highest permitted gear in the said second working speed range of the said control unit. In a fourth stage 130 of the method either the said first or second operating mode of the said control unit is selected. In a fifth stage 140 of the
20 method a downshift signal to a gearbox is generated on passing the said first limit, should the control unit have assumed its first operating mode. In a sixth stage 150 of the method, the vehicle is driven in the said highest permitted gear in the said second speed range. In a seventh stage 160 of the method a downshift signal to a gearbox is where necessary generated on passing the said
25 second limit, should the control unit have assumed its second operating mode. After downshifting, the control unit normally maintains its second operating mode 110. In each stage of the method it is possible to return from the second to the first operating mode. Figure 10 shows a schematic representation of the sixth stage 150 of the method in which, from input data relating to the vehicle

weight 58 and road gradient 59, output data on the highest permitted gear 61 are emitted from a representation 73.

5 In a preferred embodiment of the method described above, downshifting from the said highest permitted gear at idling speed is undertaken following the occurrence of slip in a clutch unit forming part of the vehicle drivetrain, the said slip occurring as a result of the fact the torque required to drive the vehicle in the current operating situation is greater than a predetermined torque level of the idling speed regulator of the internal combustion engine.

10

In a further preferred embodiment of the method described above the control unit assumes its second operating mode in that a throttle lever forming part of the vehicle is released during operation of the vehicle.

15 The invention is not confined to the exemplary embodiments described above, but can be freely modified without departing from the scope of the following claims. For example, the engine and gearbox may be designed in alternative ways familiar to the person skilled in the art. The drivetrain need not contain a dry-plate clutch but can be designed with a torque converter in a manner familiar
20 to the person skilled in the art. In particular the invention can also be used in more complex gear selection strategies than those described above, such as gear selection strategies involving multiple upshifting or downshifting stages, for example.

CLAIMS

- 1) A vehicle comprising a drivetrain, having an internal combustion engine (1) and a gearbox (9) coupled to the said internal combustion engine, and a control unit (45) for automatic gear selection as a function of the current rotational speed of an input shaft to the gearbox (9), in which the said control unit (45) has a first operating mode (56) with a first working speed range (81) defined by a first lower limit (68) for downshifting to a gear with a higher transmission ratio, **characterized in that** the said control unit (45) has a second operating mode (57) with a second working speed range (70) defined by a second lower limit (69) for downshifting to a gear with a higher transmission ratio, in which the second limit (69) is lower than the idling speed (80) of the internal combustion engine and is equal to a lower rotational speed than the first lower limit (68).
- 2) The vehicle as claimed in claim 1, **characterized in that** the control unit (45) comprises a memory unit (72) in which a representation (74) of the highest permitted gear in the said second working speed range (70) is stored.
- 3) The vehicle as claimed in claim 1 or 2, **characterized in that** the said control unit (45) is designed to select the said highest permitted gear or a gear lower than the said highest permitted gear when the control unit has assumed the said second operating mode (57).
- 4) The vehicle as claimed in claim 1, 2 or 3, **characterized in that** the said control unit is coupled to elements (54) for indicating the selection of first or second operating mode.

- 5) The vehicle as claimed in any of the preceding claims, **characterized in that** the vehicle contains an engine management unit (53), which comprises an idling speed regulator (75), the said idling speed regulator (75) being designed to control the torque delivered from the internal combustion engine (1) when the vehicle is operated at idling speed in the said second operating mode (57).
- 6) The vehicle as claimed in any of the preceding claims, **characterized in that** the said representation (74) of the highest permitted gear comprises a representation (74) defining the highest permitted gear when driving at idling speed as a function of the current weight of the vehicle and the current gradient of the road on which the vehicle is being driven.
- 7) The vehicle as claimed in claim 6, **characterized in that** the said control unit (45) contains a representation (73) defining the highest permitted starting gear as a function of the current weight of the vehicle and the current gradient of the road on which the vehicle is being driven, and that the said representation (74) defining the highest permitted gear when driving at idling speed is based on the representation defining the highest permitted starting gear.
- 8) The vehicle as claimed in claim 7, **characterized in that** the said representation (74) defining the highest permitted gear at idling speed consists of the said representation defining the highest permitted starting gear (73) plus a predetermined number of gear shift stages.
- 9) The vehicle as claimed in any of the preceding claims, **characterized in that** the vehicle contains elements (45, 3) for establishing that the

internal combustion engine is delivering sufficient torque for operation of the vehicle at an operating speed equal to a rotational speed of a gearbox input shaft below the said first limit (68).

- 5 10) The vehicle as claimed in claim 9, in which the said drivetrain contains a clutch unit (3) arranged between the internal combustion engine and the gearbox, the drivetrain being divided into a first part (51) up to the clutch unit and comprising the internal combustion engine (1) and a second part from the clutch unit (3) onwards and comprising the gearbox (9),
- 10 **characterized in that** the said second limit (69) for downshifting is equal to a speed lower than the idling speed (80) of the internal combustion engine, that the vehicle contains a sensor for measuring the current rotational speed (60), and that the said sensor (60) is designed to measure the said rotational speed in the second part (52) of the
- 15 drivetrain, the said clutch unit (3) being designed to absorb a speed differential between the rotational speed of the first and second parts (51 152) of the drivetrain where insufficient torque has been delivered by the internal combustion engine (1), following which a rotational speed equal to the second downshifting limit is reached and downshifting is
- 20 permitted.
- 11) The vehicle as claimed in claim 9, **characterized in that** the said control unit (45) is designed to establish that the internal combustion engine (1) is delivering sufficient torque by performing a comparison between an
- 25 estimate of the torque delivered by the internal combustion engine (1) in the current operating state and the torque demanded from the internal combustion engine (1) for operation of the vehicle in the current operating state.

- 12) The vehicle as claimed in any of the preceding claims, **characterized in that** the said elements (54) for indicating selection of the first or second operating mode comprise a throttle lever (54) forming part of the vehicle, the said control unit being designed to assume its second operating mode (57) should the throttle lever (54) be released into an idling position whilst in motion.
- 13) A method for automatic gear selection in a gearbox (9) forming part of a vehicle as a function of the current rotational speed of a shaft forming part of the said gearbox comprising the following stages:
- establishing of a first operating mode (56) of a control unit (45), in which the first operating mode (56) comprises a first working speed range (81) with a first lower limit for downshifting to a gear with a higher transmission ratio;
 - establishing a second operating mode (57) of the said control unit (45) in which the second operating mode (57) comprises a second working speed range (70) with a second lower limit (69) for downshifting to a gear having a higher transmission ratio, where the second lower limit (69) is lower than the idling speed (80) of the internal combustion engine (1);
 - establishing of a representation (74) of the highest permitted gear in the said second working speed range of the said control unit;
 - selection of either the said first or second operating mode (56, 57) of the said control unit (45);
 - generation of a downshift signal to a gearbox on passing the said first limit (68), should the control unit have assumed its first operating mode (56);
 - driving of the vehicle in the said highest permitted gear in the said second speed range (70); and

- generation of a downshift signal to a gearbox on passing the said second limit (69), should the control unit have assumed its second operating mode (57).

- 5 14) The method as claimed in claim 13, **characterized in that** a management unit (53) assigned to the internal combustion engine comprises an idling speed regulator (75), the said idling speed regulator (75) controlling the torque delivered by the internal combustion engine when the vehicle is operated at idling speed in the said second operating mode.
- 10
- 15) The method as claimed in either of claims 13 or 14, **characterized in that** the said highest permitted gear is selected from the said representation (74) of the highest permitted gear as a function of the
- 15 current weight of the vehicle and the current gradient of the road on which the vehicle is being driven.
- 16) The method as claimed in either of claims 13 or 14, **characterized in that** the said control unit (45) contains a representation (74) defining the
- 20 highest permitted starting gear as a function of the current weight of the vehicle and the current gradient of the road on which the vehicle is being driven, and that the said selection of the highest permitted gear is undertaken from the said representation (73) defining the highest permitted starting gear plus a predetermined number of shift stages.
- 25
- 17) The method as claimed in any of claims 13 to 16, **characterized in that** downshifting from the said highest permitted gear at idling speed is undertaken following the occurrence of slip in a clutch unit (3) forming part of the vehicle drivetrain, the said slip occurring as a result of the fact


that the torque required to drive the vehicle in the current operating situation is greater than a predetermined torque level of the idling speed regulator (75) of the internal combustion engine.

- 5 18) The method as claimed in any of claims 13 to 17, **characterized in that** the control unit assumes its second operating mode (57) in that a throttle lever (54) forming part of the vehicle is released during operation of the vehicle.


ABSTRACT


Vehicle comprising an internal combustion engine and a drivetrain coupled to the said internal combustion engine, together with a control unit for automatic gear selection as a function of the current rotational speed of an input shaft to the gearbox, in which the said control unit is designed to assume a first operating mode having a first working speed range with a first lower limit for downshifting to a gear with a higher transmission ratio, and method of automatic gear selection in a gearbox forming part of a vehicle.


1/9

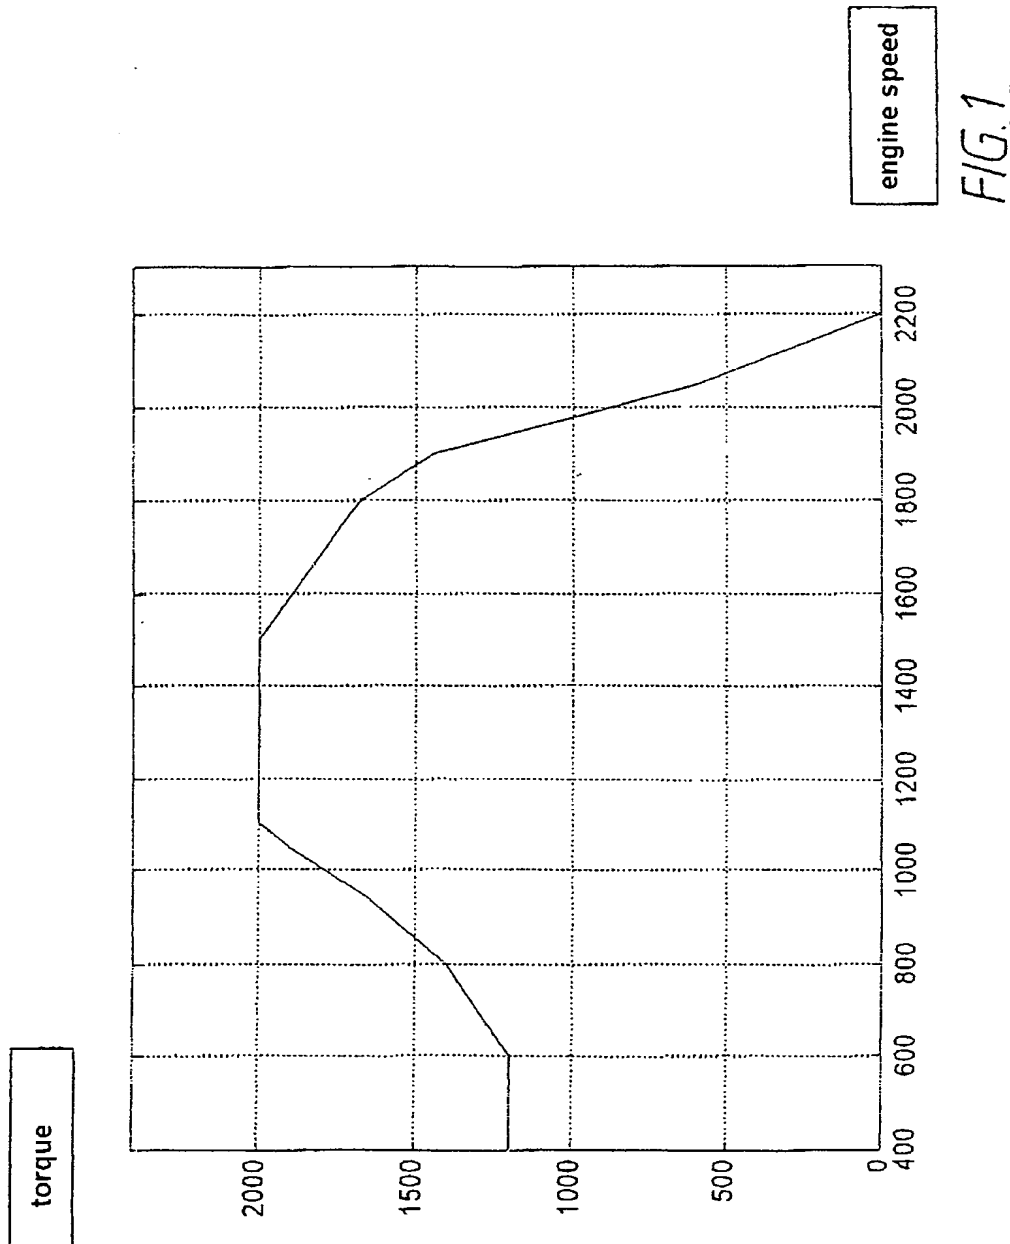


2/9

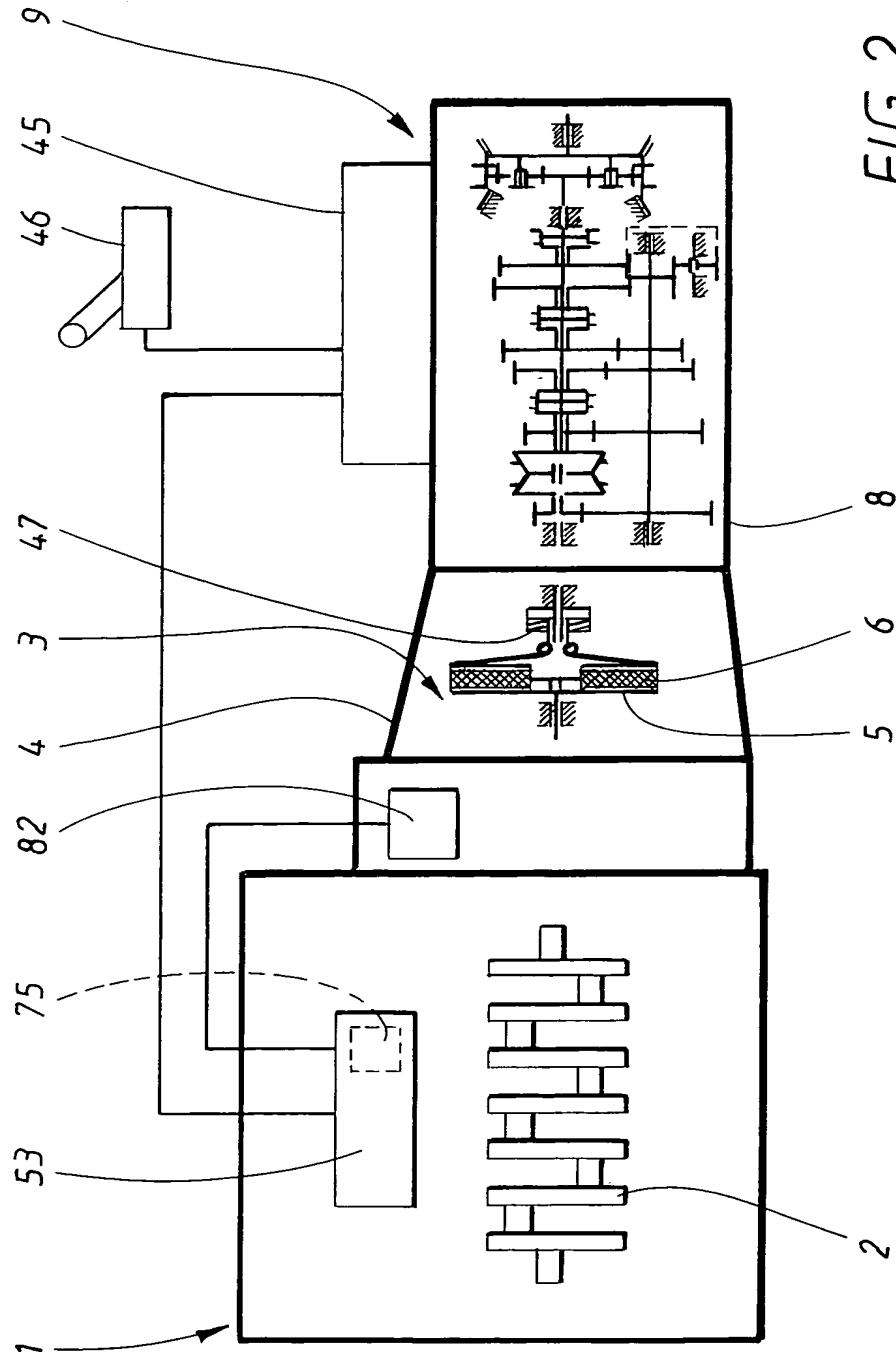FIG. 2

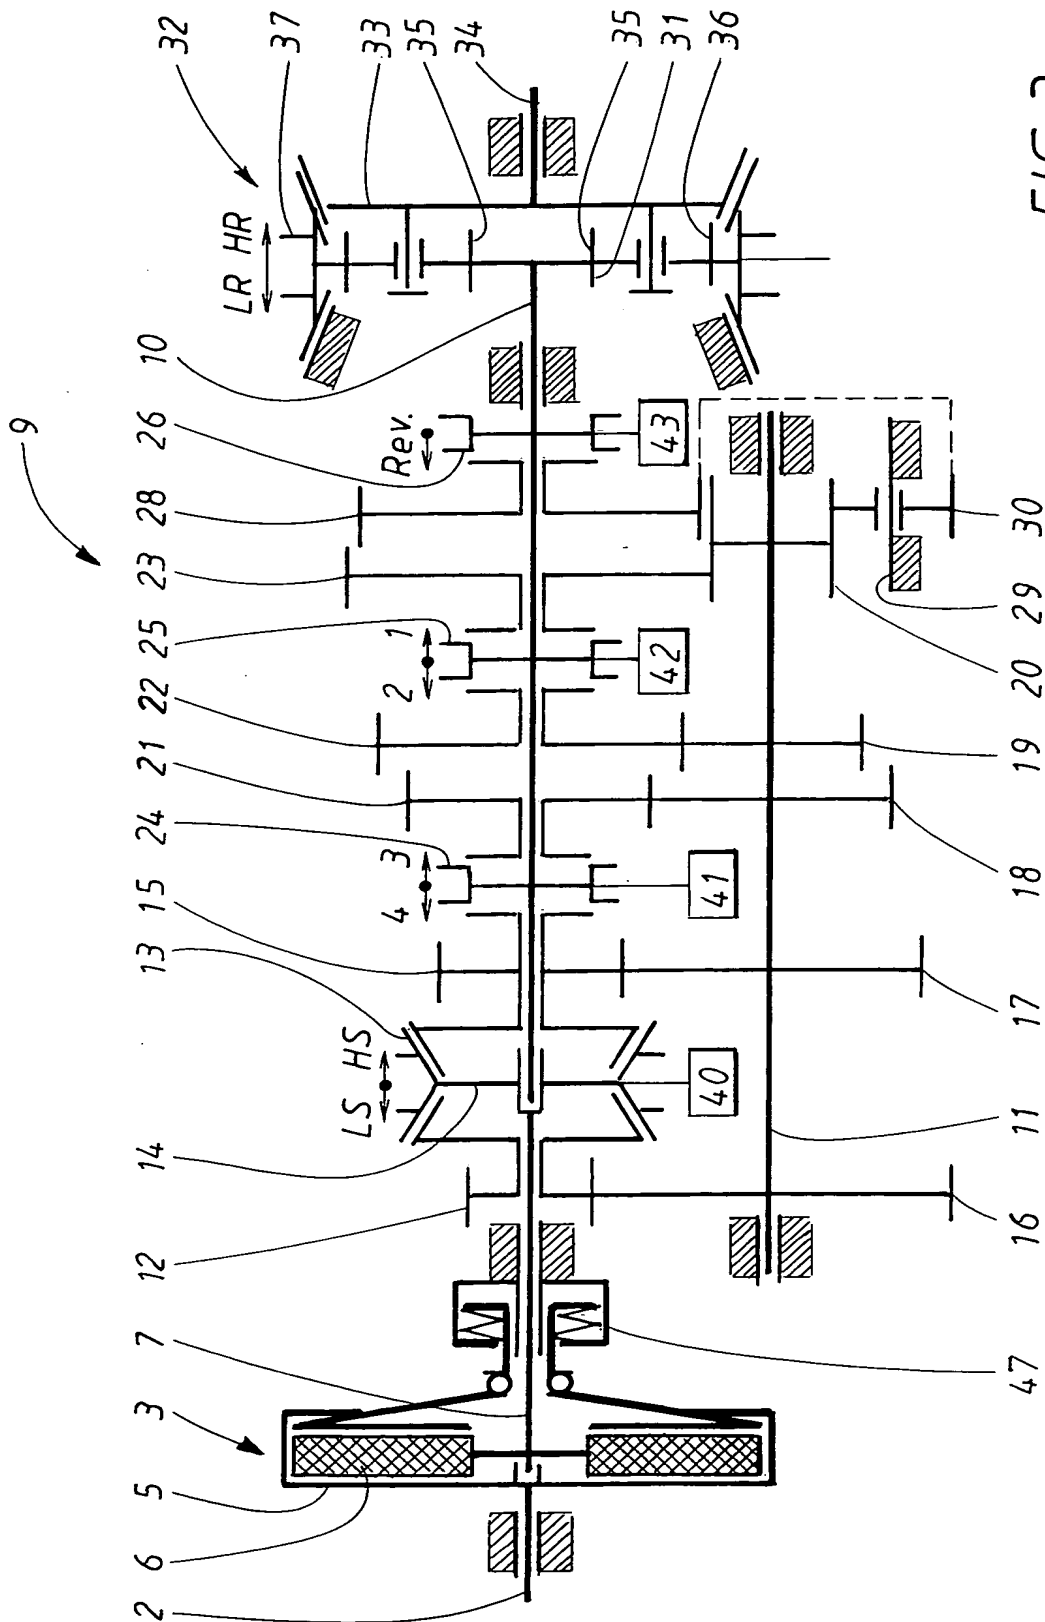FIG. 3

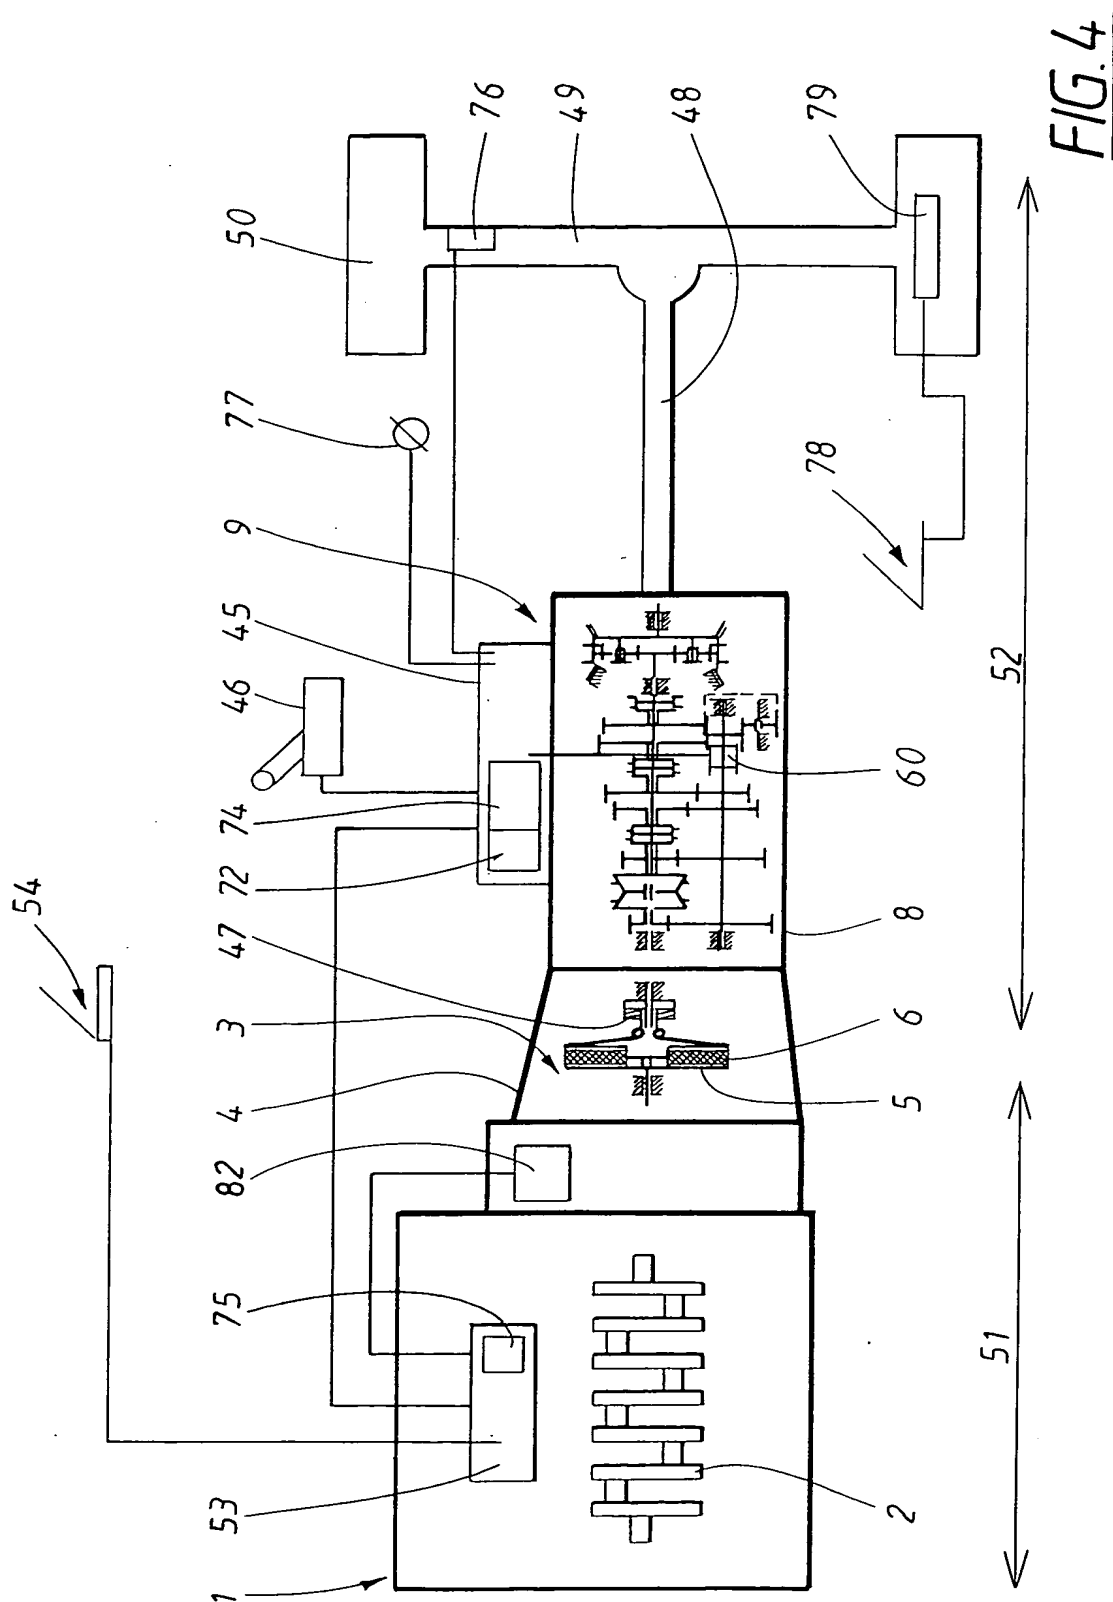

5/9

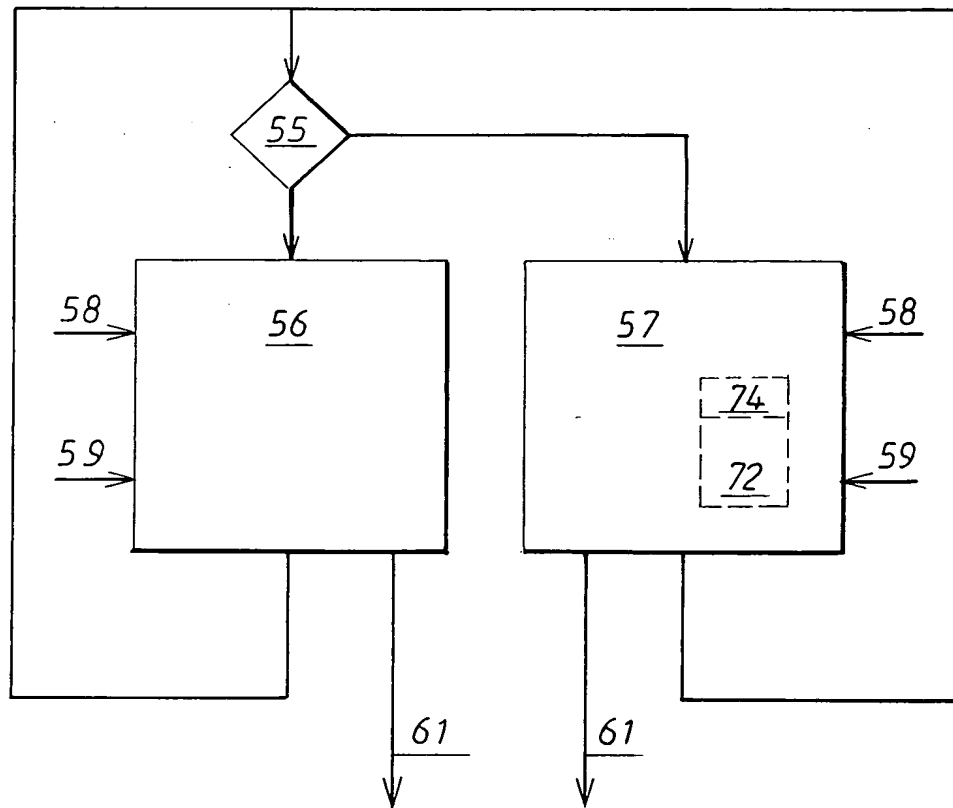FIG. 5

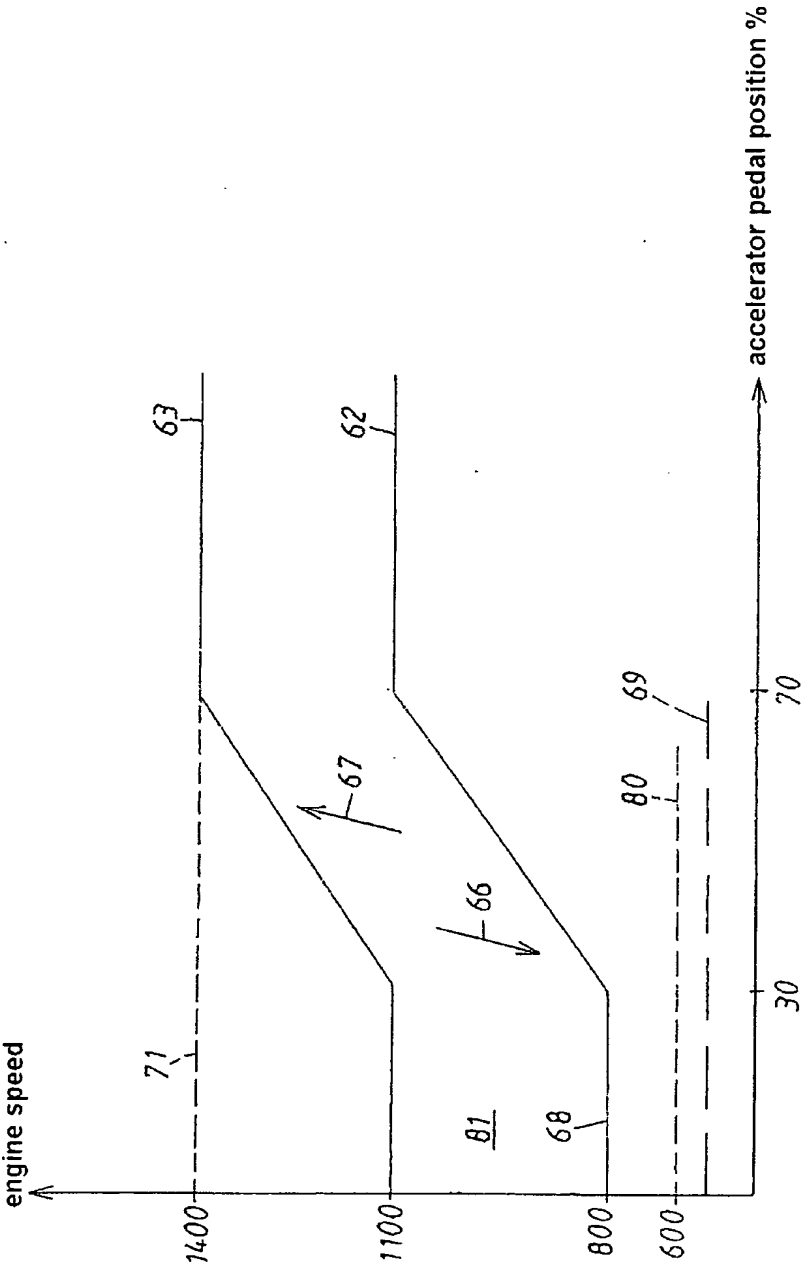


FIG. 6

7/9

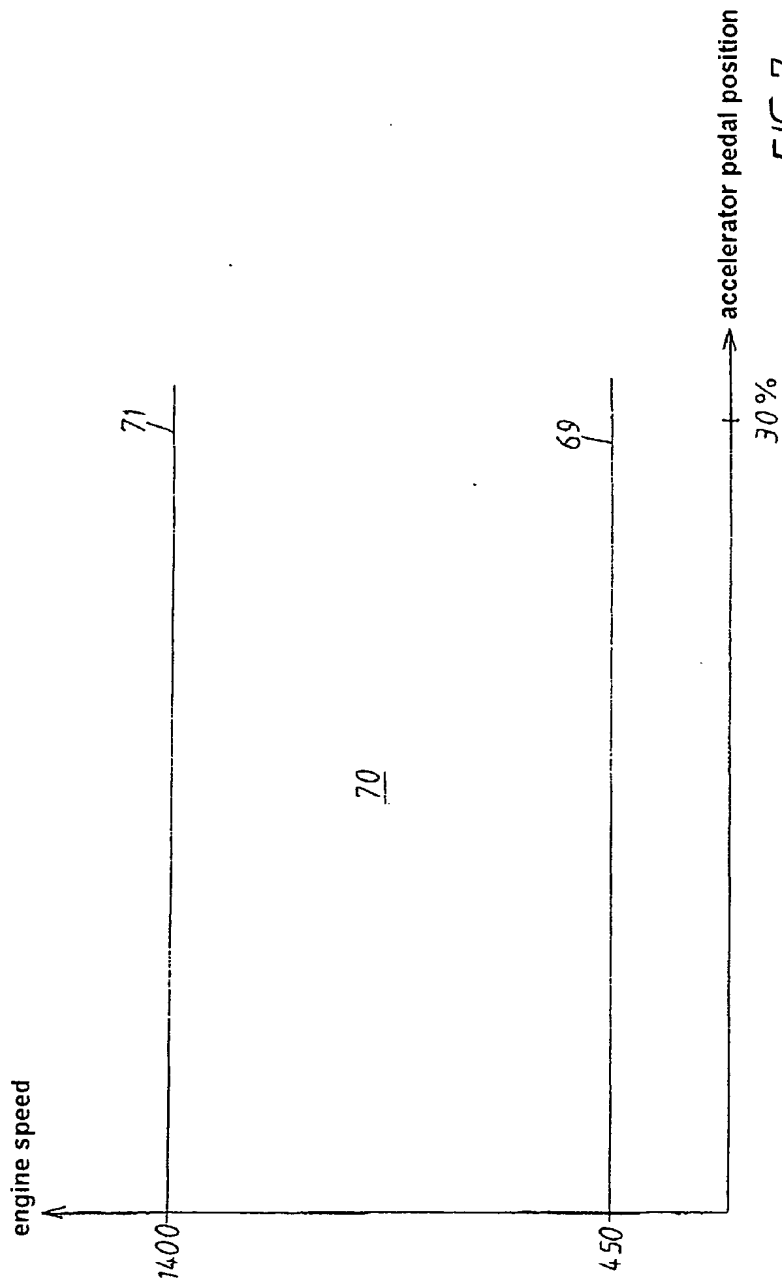


FIG. 7

8/9

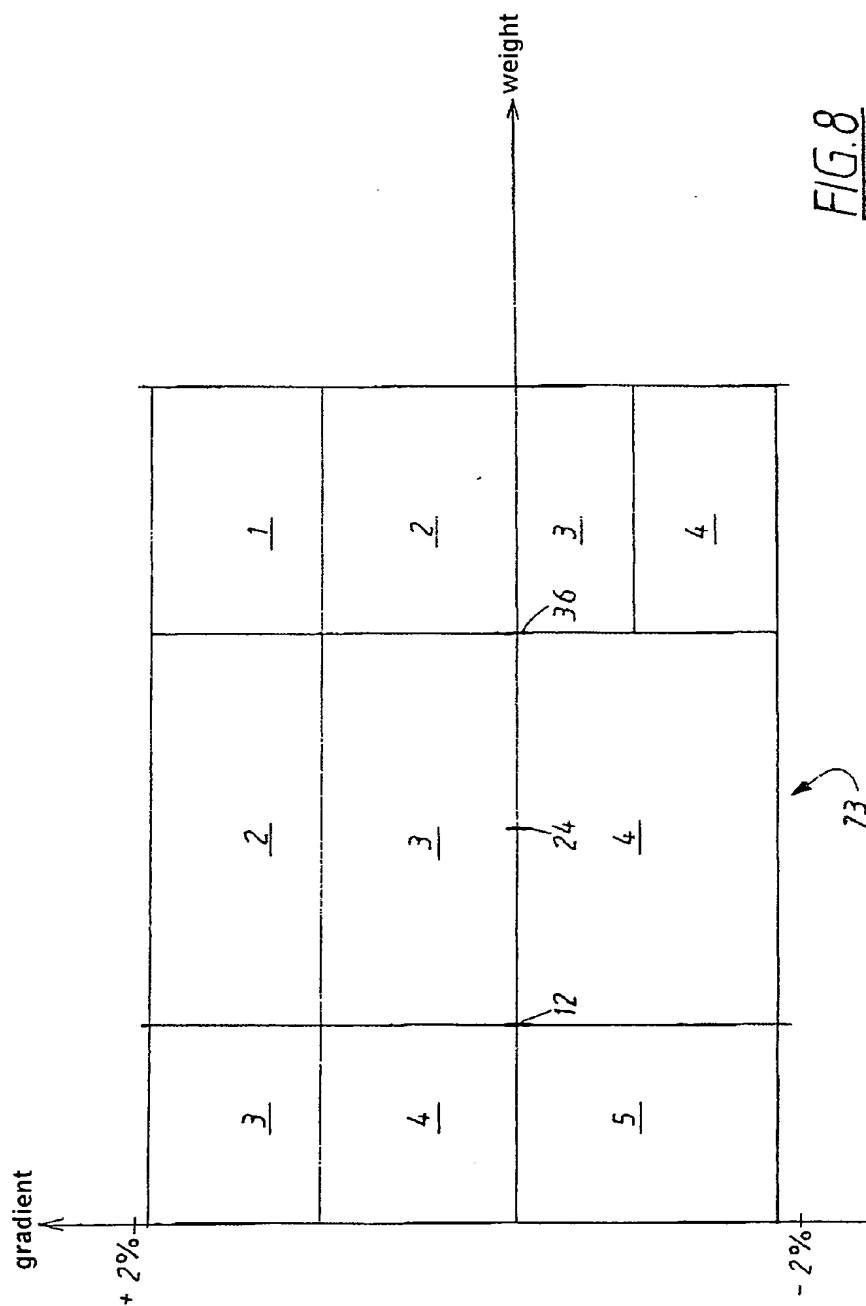
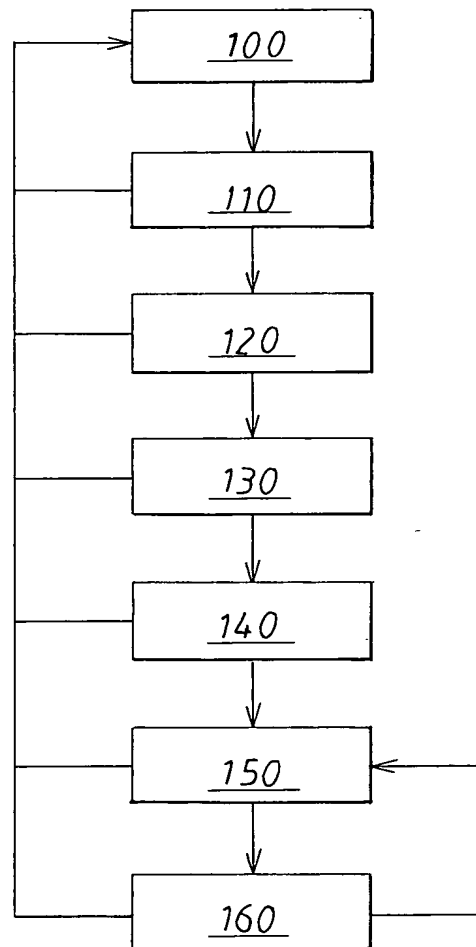
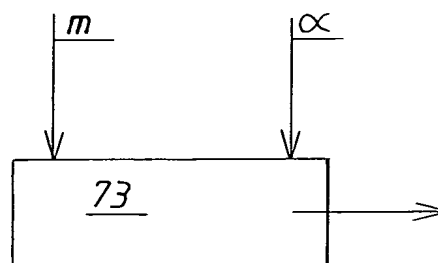


FIG. 8

9/9

FIG. 9FIG. 10